

Pigment Dispersions for Solvent-Based Coatings

Tint-Ayd® HS colorants are low VOC, polyester-based colorants for tinting high-performance solvent-based and high-solids industrial coatings. These colorants are compatible with a wide range of industrial coatings chemistries.

Key Benefits

Tint-Ayd® HS colorants are stable, free-flowing solvent-free concentrates recommended for use in high-performance single- or two-component solvent-based industrial coatings. They have excellent compatibility with a wide variety of coatings and have a rheological profile suitable for POS and in-plant tinting applications.

These colorants are based on a monomer-free polyester resin. The dispersing resin was chosen because of its broad compatibility with a variety of coatings chemistries. These colorants are formulated to be thixotropic to resist pigment settling and syneresis.

Applications

The Tint-Ayd® HS colorants are formulated for use in many industrial coatings including, but not limited to automotive putties, coil, concrete protection, gel coats, general industrial finishes, industrial maintenance, UV, and wood coatings.

Properties

The resin in the Tint-Ayd® HS colorants is reactive. This resin will be reactive in the final film provided the base system is also reacted with conventional monomers and/or catalysts.

The Tint-Ayd® HS colorants do not contain any added solvents. Due to the potential volatile content within the raw materials used in these colorants, the expected VOC levels should be less than 20 g/L.

Compatibility


Tint-Ayd® HS colorants are recommended for use in a wide variety of solvent-based coating systems such as acrylic, vinyl acrylic, polyester, polyaspartic, long-oil alkyd, medium-oil alkyd, short-oil alkyd, alkyd melamine, styrenated alkyd, vinyl toluene alkyd, alkyd urea, cellulose acetate butyrate, two-component epoxy (100% solids), and vinyl epoxy.

If the Tint-Ayd HS line is used to tint thermoplastic coatings, it is recommended that thorough testing to the tinted coatings is performed prior to commercialization. Since the Tint-Ayd HS colorants contain a functional resin, the colorants may act as a plasticizer in thermoplastic coatings.


Shelf Life

Proper handling is essential to maintain good quality. It is recommended that the colorants be mixed prior to use. Containers should be tightly sealed when not in use. Repacking the colorant into a smaller container should be considered if the colorant level in the container is less than 20% of the original amount and will be stored for an extended period of time.

Shelf life on the Tint-Ayd® HS colorants is 4 years from the date of manufacture in unopened containers.

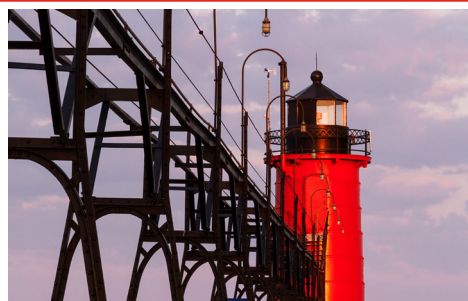

INDUSTRIAL MAINTENANCE

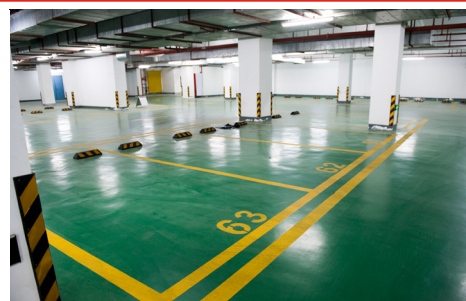

CONCRETE PROTECTION



GEL COATS

TINT-AYD® HS TECHNICAL DATA

Product Code	Description	CI Name	%Pigment		%Non-Volatiles		%Volatiles		Specific Gravity	VOC ^a g/L	Pigment Lightfastness		Pigment Resistance	
			X Wt.	X Vol.	X Wt.	X Vol.	X Wt.	X Vol.			Mass	Tint	Acid	Alkali
HS 20003	TW White	White 6	61.1	28.5	38.4	70.5	0.5	1.0	1.91	10	N	N	N	N
HS 20317	LB Tinting Black	Black 7	19.3	12.1	79.5	86.6	1.1	1.3	1.13	13	N	N	N	N
HS 20451	YO Yellow Oxide	Yellow 42	56.3	24.6	43.2	74.5	0.5	0.9	1.79	9	N	N	N	N
HS 20610	RO Red Oxide	Red 101	62.0	25.3	37.6	73.8	0.4	0.9	2.04	9	N	N	N	N
HS 20703	PG Phthalo Green	Green 7	21.2	11.9	77.7	86.9	1.1	1.3	1.16	13	N	N	N	N

^a Typical values based on ASTM 6886

Lightfastness and Resistance Key			
N	no bleed / discoloration	*	no Florida data, only Fadeometer
S	slight	**	no data
A	appreciable		

*Lightfastness and Resistance information is provided for guidance purposes only.
Source: NPRI Raw Materials Data Handbook Volume 4 (Copyright © 2000)*

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

